


Note:

- Assemble Cable Following Schematic.
- On antenna End Strip Jacket 2.5 inch
- On antenna End Strip and tin conductors .25 inch
- P2 25 Pin Dsub and 25 pin Back Shell
- Solder Drain Wire to Back of 25 Dsub Housing

J2

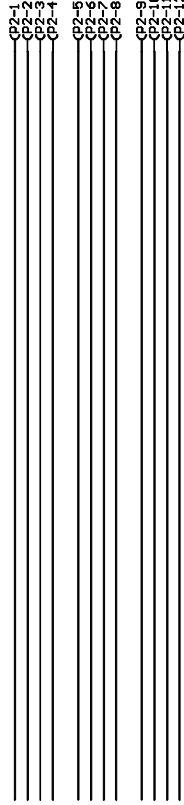

Antenna P1

CONTROLLER

Connector case

Wire List

P1-1	-----	J2-1	BLACK	Driver
P1-2	-----	J2-2	BROWN	
P1-3	-----	J2-3	RED	
P1-4	-----	J2-4	ORANGE	Director
P1-5	-----	J2-5	YELLOW	
P1-6	-----	J2-6	GREEN	
P1-7	-----	J2-7	BLUE	
P1-8	-----	J2-8	VIOLET	Reflector
P1-9	-----	J2-9	GREY	
P1-10	-----	J2-10	WHITE	
P1-11	-----	J2-11	PINK	
P1-12	-----	J2-12	SALMON (ivory)	
P1-15	-----	J2- SHELL	DRAIN	

50 Feet Plus User length

- C02-13
- C02-14
- C02-15
- C02-16
- C02-17
- C02-18
- C02-19
- C02-20
- C02-21
- C02-22
- C02-23
- C02-24
- C02-25

22 GA. Shielded 12 Conductor cable
 25 Pin Dsub Connector, Male Solder Cup.
 25 Pin Dsub Back Shell

FLUIDMOTION

TITLE: ControlToAntCableB

Document Number:

REV:

Date: 7/31/2002 11:14:58a

Sheet: 1/1