



4 pin Wether proof

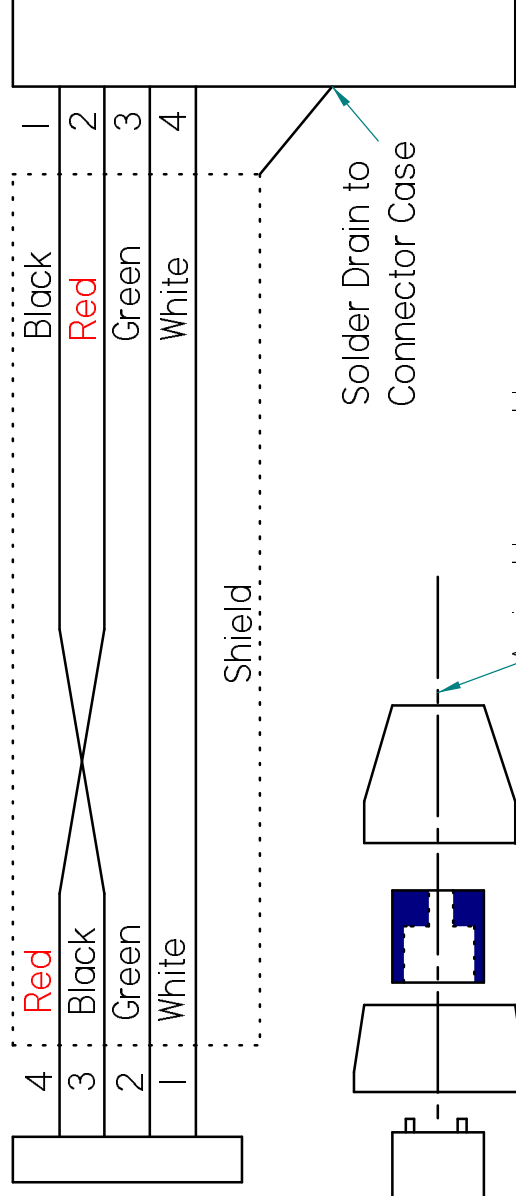

4 pin pinout Viewed From the Solder side



Materials:

1. 4 position Connector
2. 25 pin D-sub connector
3. 4 conductor 22 AWG shielded control cable.
4. 25 pin D-sub back shell

Male 25 Pin Dsub.

Caution, a miswired cable can damage the Controller.

| | |
|----------------------------|--|
| FLUIDMOTION INC. | |
| Cable, 4 conductor Control | |
| 21-6005-01 | |
| 01/29/2003 | |